

◆ Abmessungen

■ IP20 / NEMA-Typ 1

Hinweis: IP20 / NEMA-Typ 1 Frequenzumrichter wurden mit einer oberen Abdeckung ausgerüstet. Beim Entfernen dieser Abdeckung verfällt der Schutz nach NEMA Typ 1, aber die IP20-Konformität bleibt erhalten.

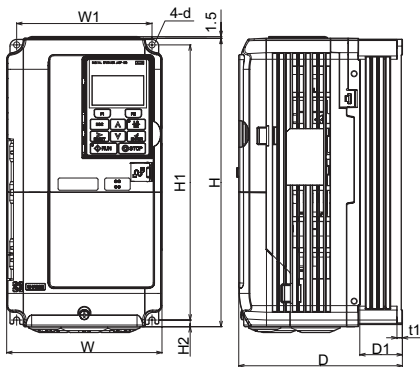


Bild 1


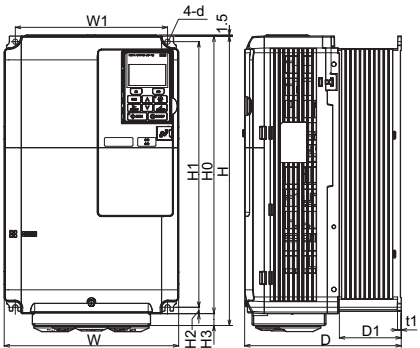


Bild 2

Modell CIMR-A□	Abb.	Abmessungen (mm)											Gewicht (kg)	
		B	H	T	B1	H0	H1	H2	H3	T1	t1	t2		d
2A0004	1	140	260	147	122	-	248	6	-	38	5	-	M5	3.1
2A0006		140	260	147	122	-	248	6	-	38	5	-	M5	3.1
2A0010		140	260	147	122	-	248	6	-	38	5	-	M5	3.2
2A0012		140	260	147	122	-	248	6	-	38	5	-	M5	3.2
2A0021		140	260	164	122	-	248	6	-	55	5	-	M5	3.5
2A0030		140	260	167	122	-	248	6	-	55	5	-	M5	4.0
2A0040		140	260	167	122	-	248	6	-	55	5	-	M5	4.0
2A0056		180	300	187	160	-	284	8	-	75	5	-	M5	5.6
2A0069		220	350	197	192	-	335	8	-	78	5	-	M6	8.7
2A0081		2	220	365	197	192	350	335	8	15	78	5	-	M6
4A0002	1	140	260	147	122	-	248	6	-	38	5	-	M5	3.2
4A0004		140	260	147	122	-	248	6	-	38	5	-	M5	3.2
4A0005		140	260	147	122	-	248	6	-	38	5	-	M5	3.2
4A0007		140	260	164	122	-	248	6	-	55	5	-	M5	3.4
4A0009		140	260	164	122	-	248	6	-	55	5	-	M5	3.5
4A0011		140	260	164	122	-	248	6	-	55	5	-	M5	3.5
4A0018		140	260	167	122	-	248	6	-	55	5	-	M5	3.9
4A0023		140	260	167	122	-	248	6	-	55	5	-	M5	3.9
4A0031		180	300	167	160	-	284	8	-	55	5	-	M5	5.4
4A0038		180	300	187	160	-	284	8	-	75	5	-	M5	5.7
4A0044	220	350	197	192	-	335	8	-	78	5	-	M6	8.3	

■ IP00

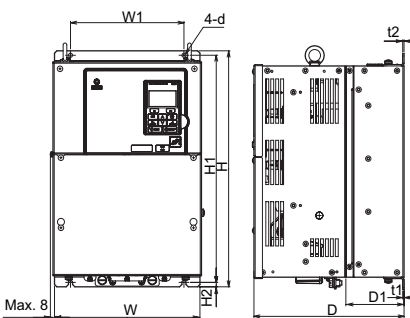

Modell CIMR-A□	Abmessungen (mm)										Gewicht (kg)
	B	H	T	B1	H1	H2	T1	t1	t2	d	
2A0110	250	400	258	195	385	7.5	100	2.3	2.3	M6	21
2A0138	275	450	258	220	435	7.5	100	2.3	2.3	M6	25
2A0169	325	550	283	260	535	7.5	110	2.3	2.3	M6	37
2A0211	325	550	283	260	535	7.5	110	2.3	2.3	M6	38
4A0058	250	400	258	195	385	7.5	100	2.3	2.3	M6	21
4A0072	275	450	258	220	435	7.5	100	2.3	2.3	M6	25
4A0088	325	510	258	260	495	7.5	105	2.3	3.2	M6	36
4A0103	325	510	258	260	495	7.5	105	2.3	3.2	M6	36
4A0139	325	550	283	260	535	7.5	110	2.3	2.3	M6	41
4A0165	325	550	283	260	535	7.5	110	2.3	2.3	M6	42